

# Murrine Cutter

**Bugeye**<sup>™</sup>  
Products, Inc.

(319) 389-4581

[bugeyeproducts.com](http://bugeyeproducts.com)

## Safety

**1. Always wear safety glasses when using your Bugeye Products Murrine Cutter.**

Norm Abram from "This old House" said it best:

*"...remember this, there is no more important safety rule than to wear these: safety glasses!"*

**2. All safety shields should be in place and secure when using the cutter.**

The two pictures at right show the material inflow guard and the product chute. Both guards are for your safety and protection, they are integral components of your cutter and should be in place when operating the cutter.

**3. Never place anything in the cutter you do not intend to cut.**

**4. Keep fingers and all body parts away from blades and behind safety guards.**



*Material Inflow Guard*



*Material Chute*

# Cutter Operation


1. **Securely clamp the cutter to a flat horizontal surface using the wing screw at the base of the unit.**

Make sure there is sufficient room to mount the material chute to the side of the cutter.



Wing Screw


2. **Set murrine length guide, if desired, by using the thumb screw to move the gauge.**

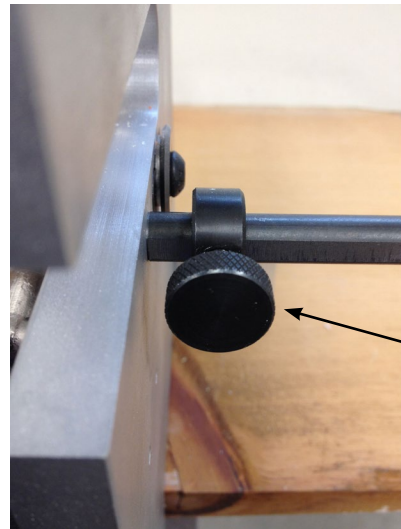

Thumb Screw

3. **Mount material chute on unit.**


- Fit chute over two pegs at top of cutter.
- Chute should fit securely to cutter if properly installed.
- A foam supermarket tray works well to gently catch the finished murrine.
- **Note: The chute must be in place before the cutter is used.**

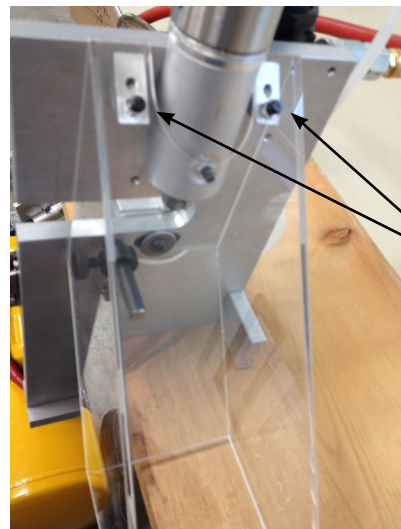

Peg

# Cutter Operation – continued

**4. Connect air line to the cutter quick connect fitting on regulator.**

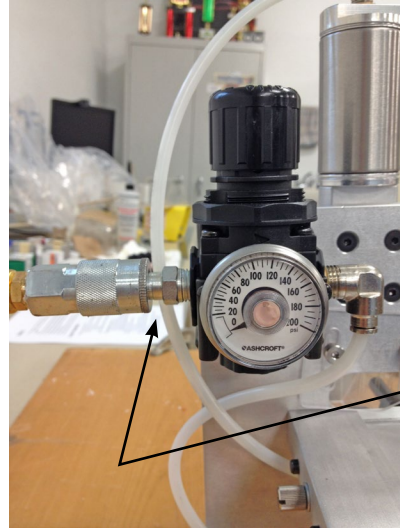

*Quick Connect Fitting*


**5. Adjust air pressure with knob on regulator.**

- Pull up on knob to adjust. Press down to lock.
- Never exceed 125 PSI.
- Use only enough air pressure to cut the murrine.
- 30 PSI or less will cut ½ inch material in most cases.



*Air Pressure Knob*

**6. If desired, move material fence into position by using the thumb screw.**

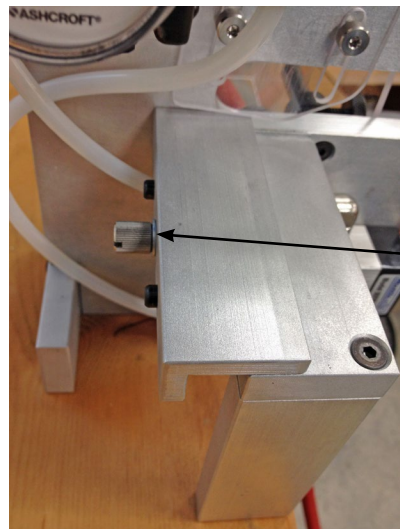


*Thumb Screw*

# Cutter Operation – continued


## 7. Feed material into the blades by placing the material on the platform under the inflow guard.

- Note: For best results, position material on center of blades.

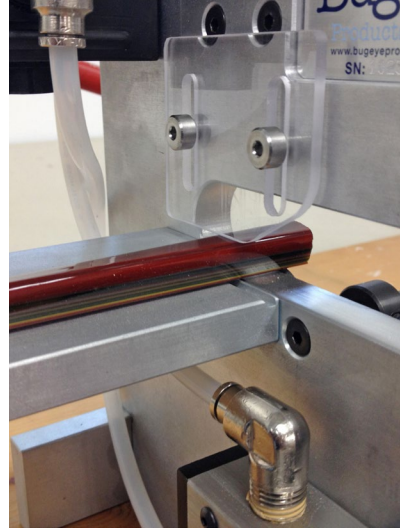

## 8. Once the desired length of murrine is extended past the blades, press the green button on the actuator switch to activate cutter blades.

- Continue feeding material into blades and activating cutter.

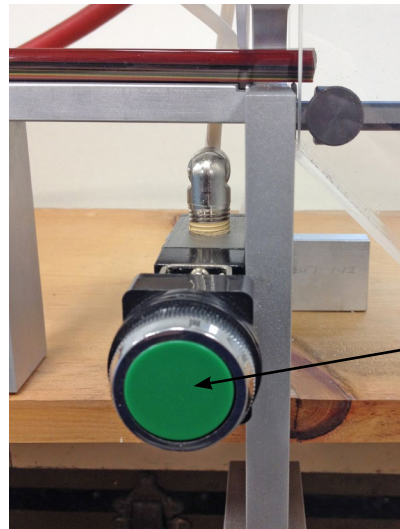

# Maintenance

**With proper use and maintenance, the Bugeye Products Murrine Cutter will provide years of service. Please follow these easy maintenance guidelines.**

- Keep cutter clean and dry.
- Rotate blades when needed.
- Keep all shields and guards in place.

**Contact us for service, support and replacement parts.**